



◆OUTLINE DIMENSION

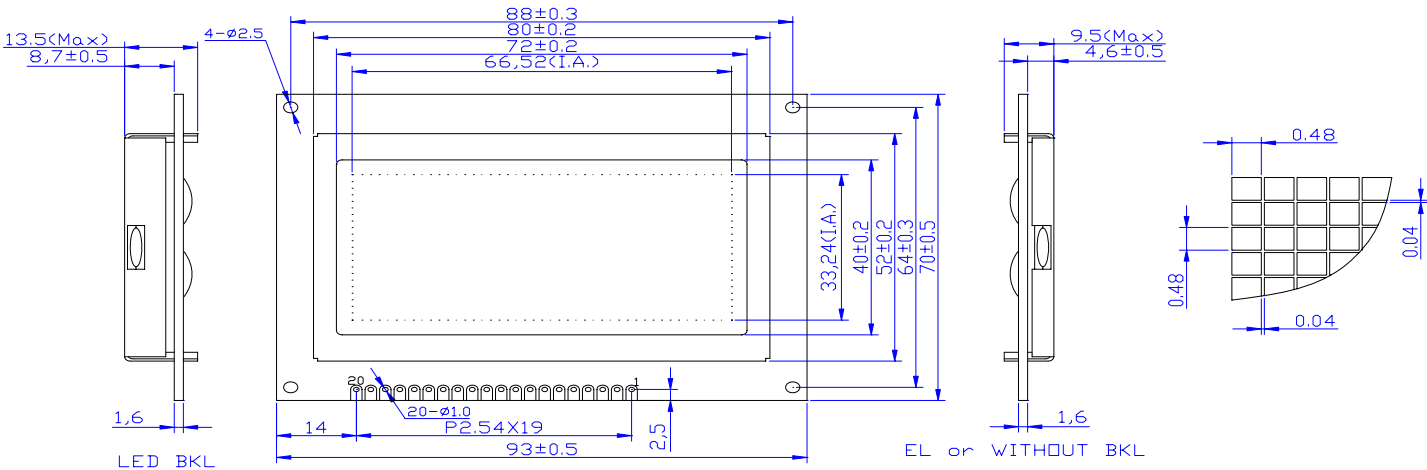

◆BLOCK DIAGRAM & POWER SUPPLY

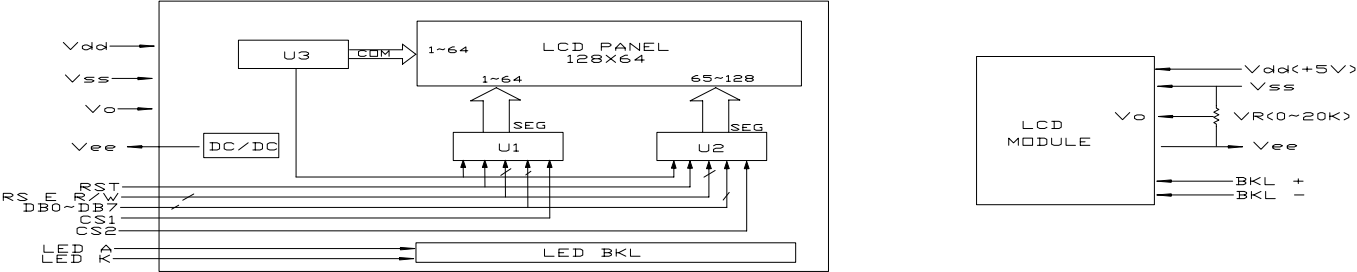

◆MECHANICAL SPEC. & FEATURES

Item	Dimension(mm)	Features	
Module Size(W×H×T)	93.0×70.0×9.5/13.5	LC Fluid	STN (Yellow-green, Gray, Blue), FSTN
Viewing Area(W×H)	72.0×40.0	Polarizer	Reflective, Transflective, Transmissive
Dot Size(W×H)	0.48×0.48	View Angle	6:00 o'clock or 12:00 o'clock
Dot Pitch(W×H)	0.52×0.52	Display Type	Positive or Negative
Dots×Dots	128×64	Backlight	LED (Optional)
		Operating Temp.	0℃~50℃ or -20℃~70℃
		Controller	S6B0108 or Equivalent

◆INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Function	Pin No.	Symbol	Function
1	Vss	Ground for logic	15	CS1	Enable signal for IC1
2	Vdd	Power supply for logic	16	CS2	Enable signal for IC2
3	Vo	Power supply for LCD	17	RST	Reset signal
4	RS	Register selection (H:Data, L:Instruction)	18	Vee	Negative voltage output
5	R/W	Read/Write selection (H: R, L: W)	19	A	BKL +
6	E	Enable signal	20	K	BKL -
7~14	DB0~DB7	Data bus lines			

◆ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25℃	---	5.0	---	V
Operating Voltage for LCD	Vlcd	Ta=25℃	---	10.5	---	V