


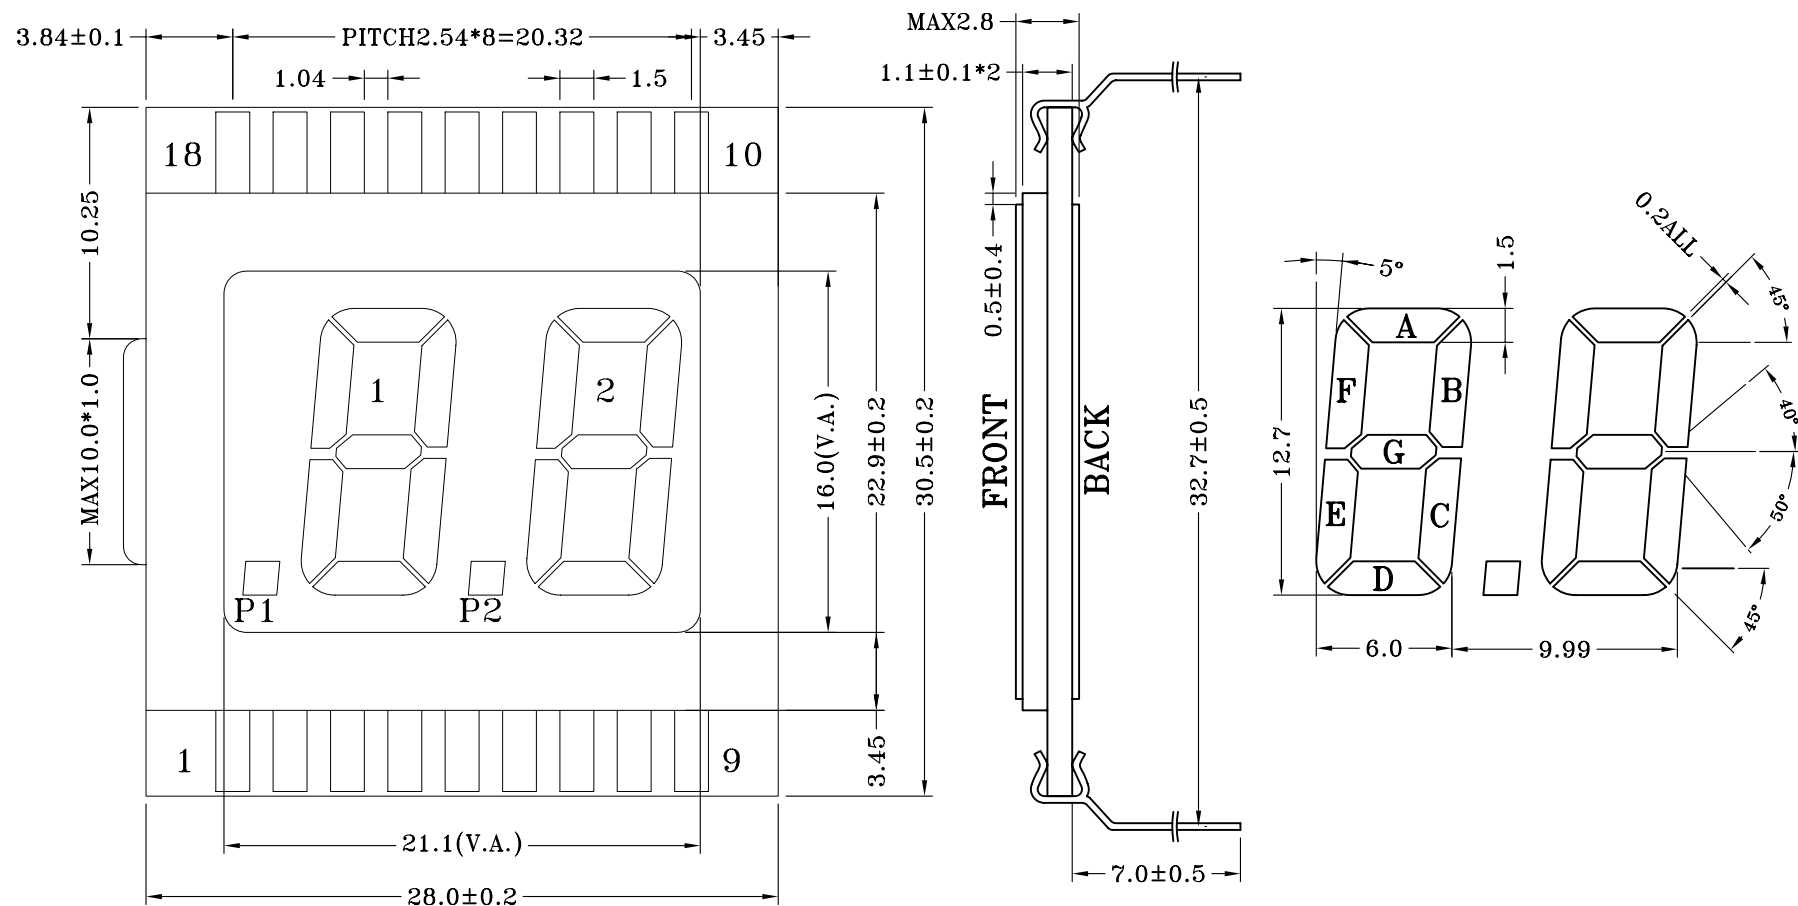

1.ALL DIMENSIONS ARE IN mm WITH ± 0.20
TOLERANCE UNLESS OTHERWISE SPECIFIED.

2.VIEWING ANGLE: 6:00 O'CLOCK.

3.VIEWING MODE: POSITIVE, REFLECTIVE

4.DISPLAY TYPE : TN

5.CONNECTOR: PIN

6.FLUID SPECIFICATION:

DRIVING VOLTAGE: 3.0V


MULTIPLEX LEVEL: STATIC

OPERATING TEMP. : -30°C -- $+80^{\circ}\text{C}$

STORAGE TEMP. : -30°C -- $+80^{\circ}\text{C}$

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM	COMP1	1E	1D	1C	P2	2E	2D	2C	2B	2A	2F	2G	1B	1A	1F	1G	COM	

奈格科技有限公司
Nergal Technology Co., Ltd



客户确认:

绘图:

绘图编号: NT-121

单位: mm

审核:

客户编号:

日期: 2005.02.25

批准:

图纸版号: 01

页数: