
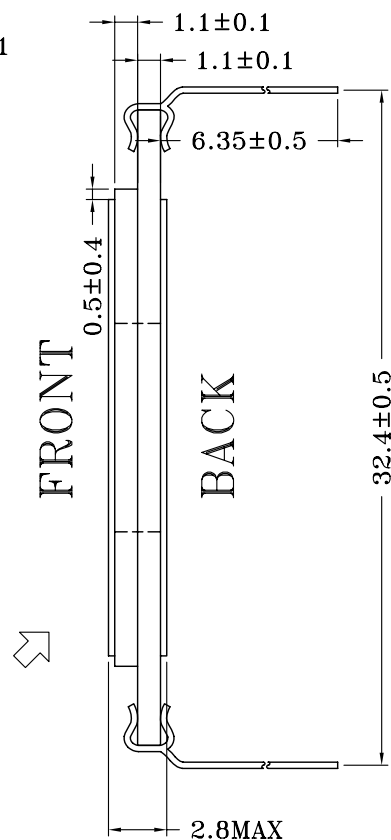
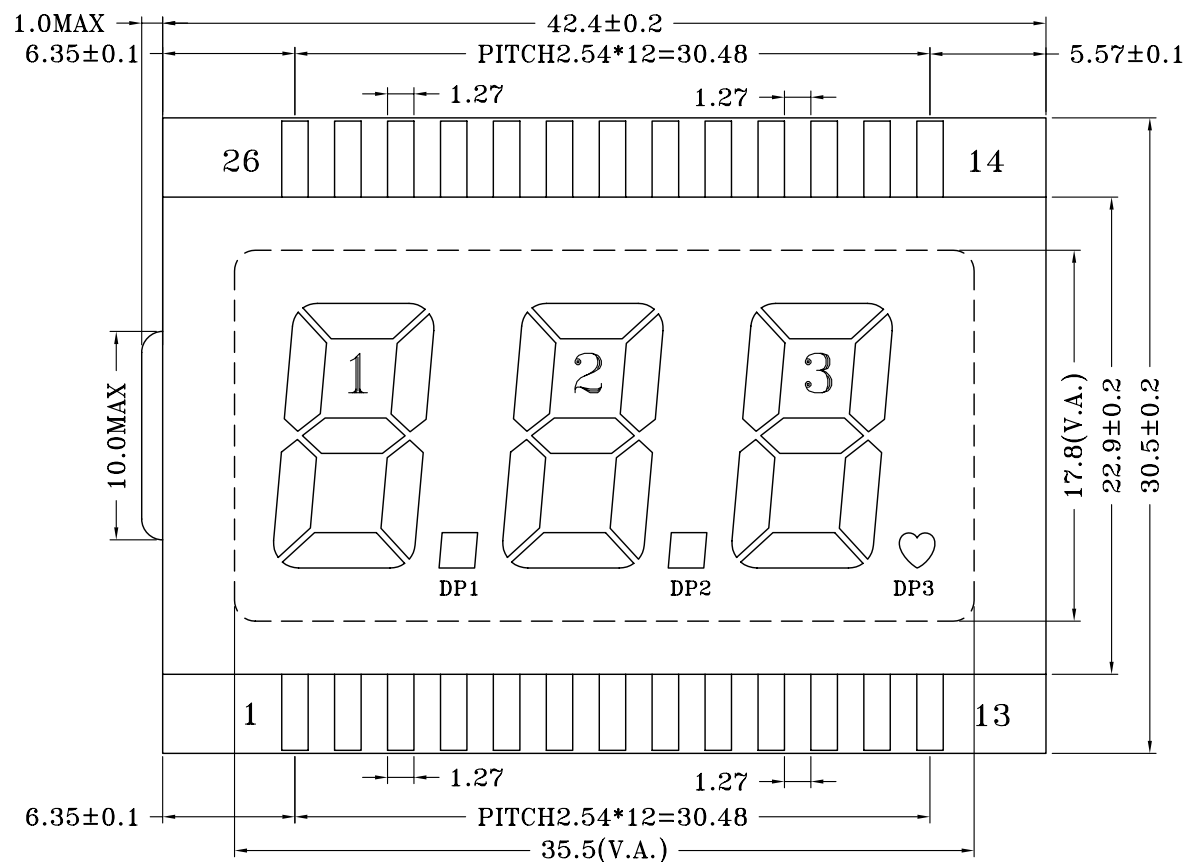


|     |     |    |    |     |    |    |    |     |    |    |    |     |     |
|-----|-----|----|----|-----|----|----|----|-----|----|----|----|-----|-----|
| PIN | 1   | 2  | 3  | 4   | 5  | 6  | 7  | 8   | 9  | 10 | 11 | 12  | 13  |
| COM | 1E  | 1D | 1C | DP1 | 2E | 2D | 2C | DP2 | 3E | 3D | 3C | DP3 | COM |
| PIN | 14  | 15 | 16 | 17  | 18 | 19 | 20 | 21  | 22 | 23 | 24 | 25  | 26  |
| COM | COM | 3B | 3A | 3F  | 3G | 2B | 2A | 2F  | 2G | 1B | 1A | 1F  | 1G  |

1.ALL DIMENSIONS ARE IN mm WITH  $\pm 0.20$   
TOLERANCE UNLESS OTHERWISE SPECIFIED.  
2.VIEWING ANGLE: 6:00 O'CLOCK.  
3.VIEWING MODE: POSITIVE, REFLECTIVE  
4.DISPLAY TYPE : TN  
5.CONNECTION: PIN  
6.FLUID SPECIFICATION:  
DRIVING VOLTAGE: 3.0V  
MULTIPLEX LEVEL: STATIC  
OPERATING TEMP. :  $-20^{\circ}\text{C}$  --  $+70^{\circ}\text{C}$   
STORAGE TEMP. :  $-20^{\circ}\text{C}$  --  $+70^{\circ}\text{C}$

奈格科技有限公司  
Nergal Technology Co.,ltd



客户确认:

绘图:

绘图编号: NT-321

单位: mm

审核:

客户编号:

日期: 2004.08.23

批准:

图纸版号: 01

页数: 1