


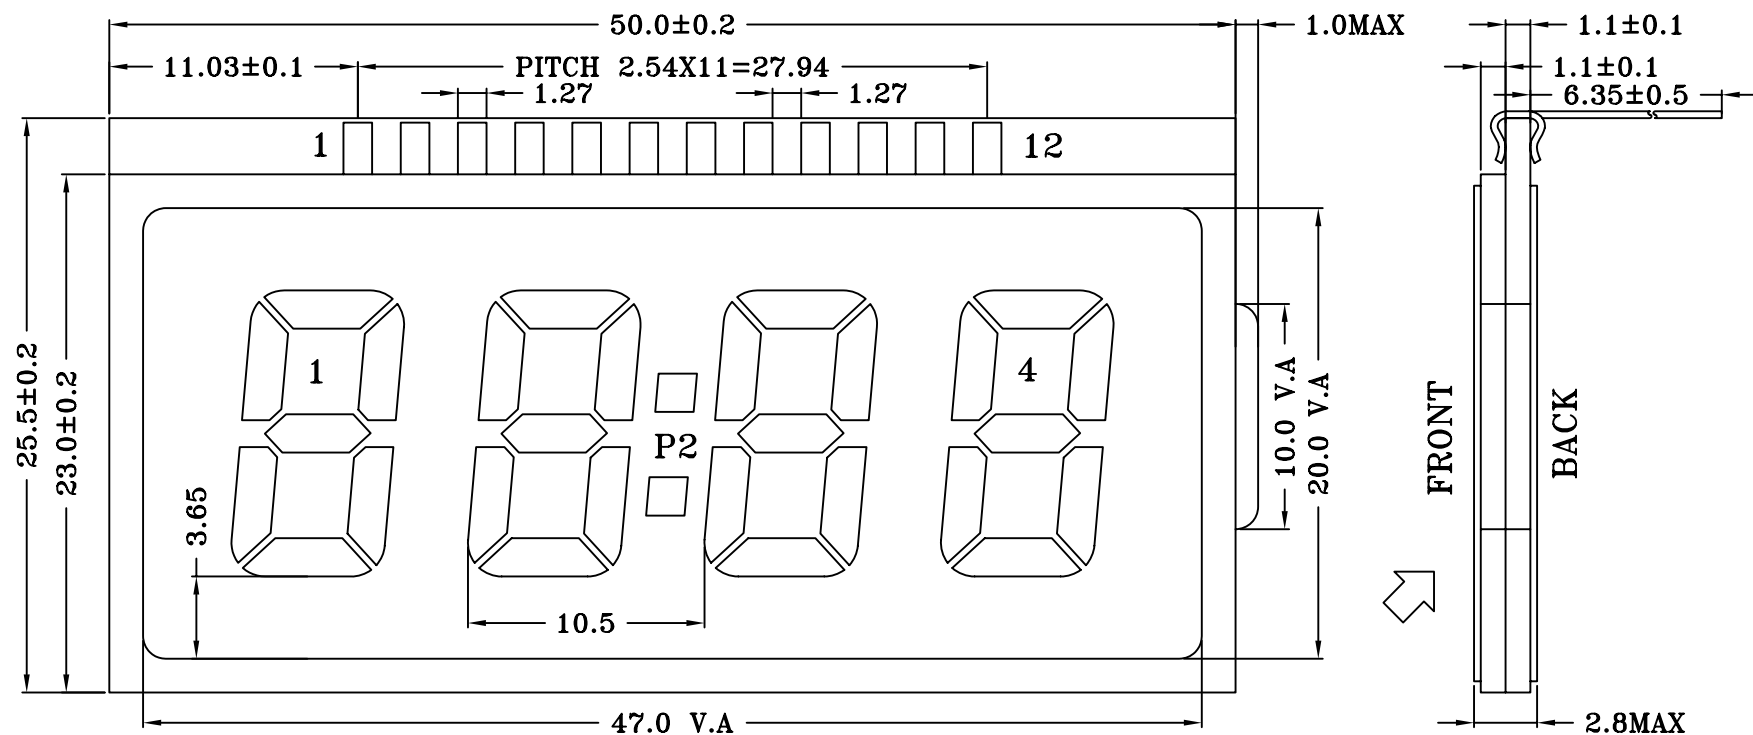

PIN	1	2	3	4	5	6	7	8	9	10	11	12
COM1	1F	1A	2F	2A	3F	3A	4F	4A	COM1	--	--	--
COM2	1G	1B	2G	2B	3G	3B	4G	4B	--	COM2	--	--
COM3	1E	1C	2E	2C	3E	3C	4E	4C	--	--	COM3	--
COM4	--	1D	--	2D	P2	3D	--	4D	--	--	--	COM4

1.ALL DIMENSIONS ARE IN mm WITH ± 0.20
TOLERANCE UNLESS OTHERWISE SPECIFIED.

2.VIEWING ANGLE: 6:00 O'CLOCK.

3.VIEWING MODE: POSITIVE, REFLECTIVE

4.DISPLAY TYPE : TN

5.CONNECTION:

6.FLUID SPECIFICATION:


DRIVING VOLTAGE: 4.5V

MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS

OPERATING TEMP. : -20°C -- $+70^{\circ}\text{C}$

STORAGE TEMP. : -25°C -- $+75^{\circ}\text{C}$

奈格科技有限公司
Nergal Technology Co., Ltd



客户确认:

绘图:

绘图编号: NT-457

单位: mm

审核:

客户编号:

日期: 2005.03.30

批准:

图纸版号: 02

页数: