



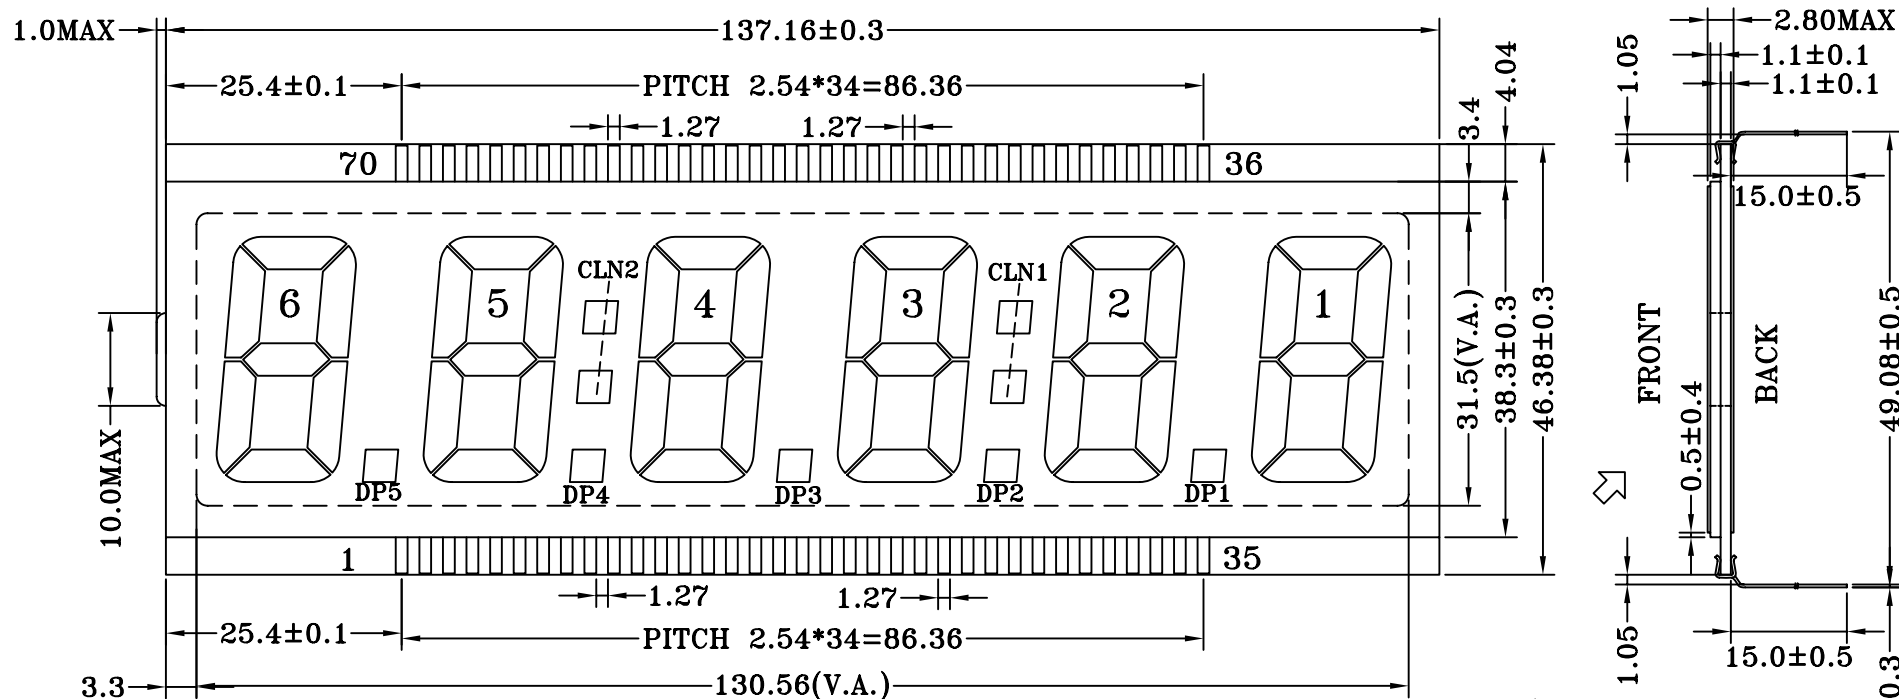


1	2	3	4	5	6	7	8	9	10	11	12	13	14
COM	E6	D6	C6	DP5	E5	D5	C5	DP4	E4	D4	--	--	--
15	16	17	18	19	20	21	22	23	24	25	26	27	28
--	C4	--	DP3	E3	D3	--	--	--	C3	--	DP2	E2	D2
29	30	31	32	33	34	35	36	37	38	39	40	41	42
--	--	C2	DP1	E1	D1	C1	B1	A1	F1	G1	B2	A2	F2
43	44	45	46	47	48	49	50	51	52	53	54	55	56
G2	CLN1	--	B3	--	--	--	A3	F3	G3	--	--	B4	--
57	58	59	60	61	62	63	64	65	66	67	68	69	70
--	A4	F4	G4	CLN2	B5	A5	F5	G5	B6	A6	F6	G6	COM

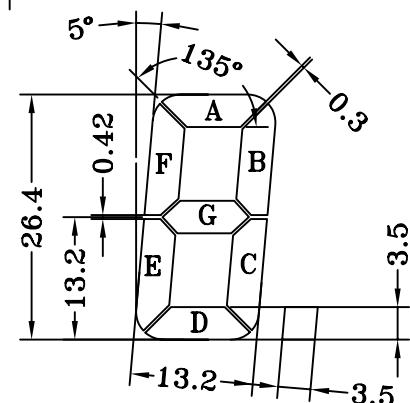

- ALL DIMENSIONS ARE IN mm WITH ± 0.3 TOLERANCE UNLESS OTHERWISE SPECIFIED.
- VIEWING ANGLE: 6:00 O'CLOCK.
- VIEWING MODE: POSITIVE TRANSMISSIVE
- DISPLAY TYPE : TN
- CONNECTION: PIN
- FLUID SPECIFICATION:
 - DRIVING VOLTAGE: 5.0V
 - MULTIPLEX LEVEL: STATIC
 - OPERATING TEMP. : -35°C -- $+80^{\circ}\text{C}$
 - STORAGE TEMP. : -40°C -- $+85^{\circ}\text{C}$

奈格科技有限公司
Nergal Technology Co.,ltd



客户确认:

绘图:

绘图编号: NT-463

单位: mm

审核:

客户编号:

日期: 2005.03.25

批准:

图纸版号: 03

页数: