


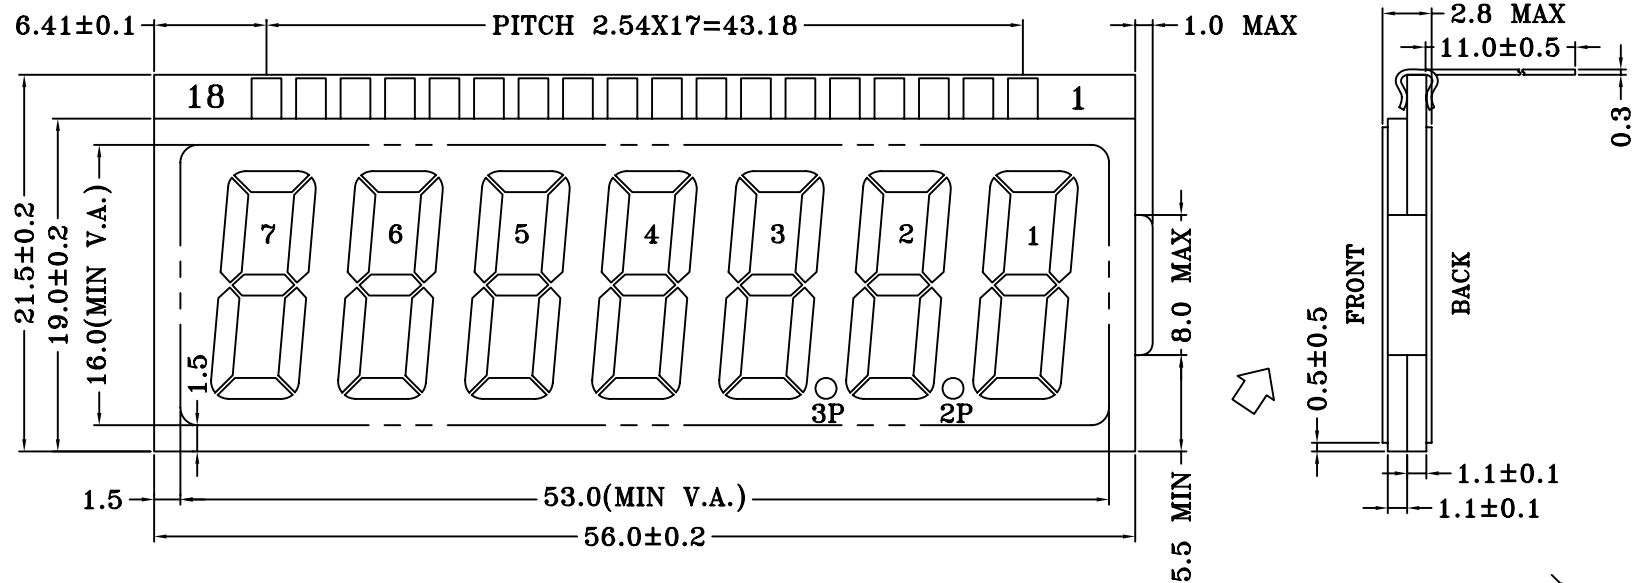

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM0	1A	1F	2A	2F	3A	3F	4A	4F	5A	5F	6A	6F	7A	7F	COM0	--	--	--
COM1	1B	1G	2B	2G	3B	3G	4B	4G	5B	5G	6B	6G	7B	7G	--	COM1	--	--
COM2	1C	1E	2C	2E	3C	3E	4C	4E	5C	5E	6C	6E	7C	7E	--	--	COM2	--
COM3	--	1D	2P	2D	3P	3D	--	4D	--	5D	--	6D	--	7D	--	--	--	COM3

- ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
- VIEWING ANGLE: 6:00 O'CLOCK.
- VIEWING MODE: POSITIVE, REFLECTIVE
- DISPLAY TYPE : TN
- CONNECTION: PIN
- FLUID SPECIFICATION:
 - DRIVING VOLTAGE: 5.0V
 - MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS
 - OPERATING TEMP. : -10°C -- $+70^\circ\text{C}$
 - STORAGE TEMP. : -20°C -- $+80^\circ\text{C}$

奈格科技有限公司 Nergal Technology Co., Ltd			
客户确认:	绘图:	绘图编号: NT-713	单位: mm
	审核:	客户编号:	日期: 2005.08.25
	批准:	图纸版号: 01	页数: