


NOTE:

- 1.VIEWING ANGLE: 6:00 O'CLOCK
- 2.DISPLAY MODE: FSTN,POSITIVE, TRANSFLECTIVE
- 3.DRIVING VOLTAGE: 9.5V,DUTY:1/64,BIAS:1/9
- 4.OPERATING TEMP. RANGE: -20°C TO 70°C
- 5.STORAGE TEMP. RANGE: -25°C TO -75°C
- 6.CONNECTION: COG+FPC
- 7.BACKLIGHT: WHITE LED SIDELIGHT

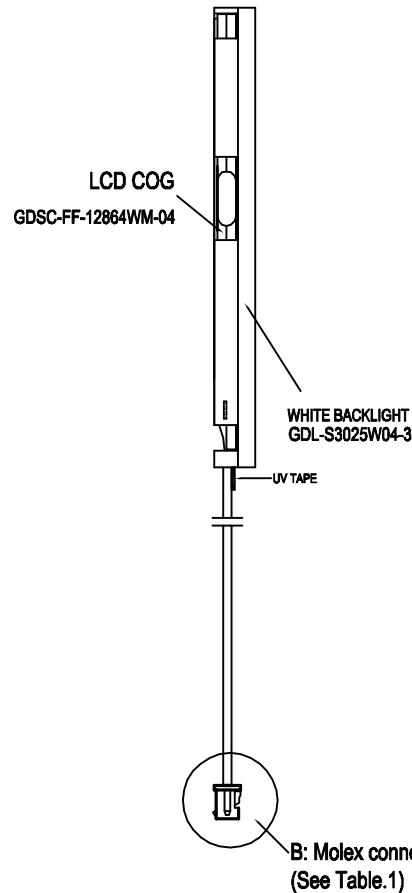

PIN CONNECTION

NO	SYMBOL
1	C63
2	VSS
3	AO
4	R/W/WR
5	BP/RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6-SCL
13	DB7-SS
14	VDD
15	VSS
16	VOUT
17	CAP5
18	CAP1
19	CAP1
20	CAP2
21	CAP2
22	V1
23	V2
24	V3
25	V4
26	V5
27	VR
28	C86
29	RS
30	RES

IC	LCD
C0-C63	COMO-COM63
S0-S127	SEGO-SEG127




Table 1. Parts of Molex connector

COMPONENTS	MOLEX NO.
RECEPTACLE	51021-0200
CRIMP TERMINAL	50058-8000

REVISION RECORD					Nergal Technology Co.,Ltd	
VER	Date	Modify Contents	Name	Confirm	Drawn:	Model Name: NGG12864E-FSW-FBW
1					Checker:	Date: 2007-12-05
2					Approved:	UNIT: mm Page: 1/1
3						
4						
5						