



PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	/CS1	18	CAP3-
2	/RES	19	CAP1+
3	A0	20	CAP1-
4	WR	21	CAP2-
5	RD	22	CAP2+
6	D0	23	CAP4-
7	D1	24	VRS
8	D2	25	V1
9	D3	26	V2
10	D4	27	V3
11	D5	28	V4
12	D6	29	V5
13	D7	30	VR
14	VDD	31	C86
15	VSS	32	P/S
16	VOUT	33	HPM
17	CAP5-	34	IRS

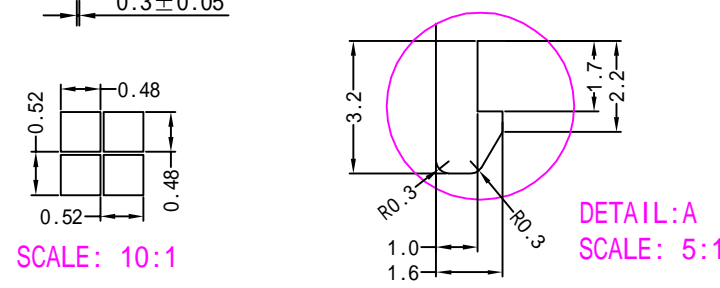

NOTE:

1. VIEWING ANGLE: 6:00 CLOCK
2. LED BACKLIGHT: WHITE
3. DRIVING VOLTAGE: VDD: 3.3V, VLCD: 11.0V, DUTY: 1/65, BIAS: 1/9, FREQUENCY: 64Hz
4. DISPLAY TYPE: FSTN, TRANSMISSIVE, POSITIVE
5. OPERATING TEMP.: -20° C TO 70° C
6. STORAGE TEMP.: -30° C To 80° C
7. CONNECTOR: FPC TYPE

TOLERANCES UNLESS OTHERWISE STATED
XX.X ±0.20 X.X ±0.10

UNIT: mm

Nergal Technology Co.,Ltd

REVISION RECORD					Drawn:	Model Name:
VER	Date	Modify	Contents	Name	ALAN	NGG12864M-FSW-FBW
2					Checker:	Date:
3						2008-10-08
4					Approved:	
5						
6					Page: 1-1	

